
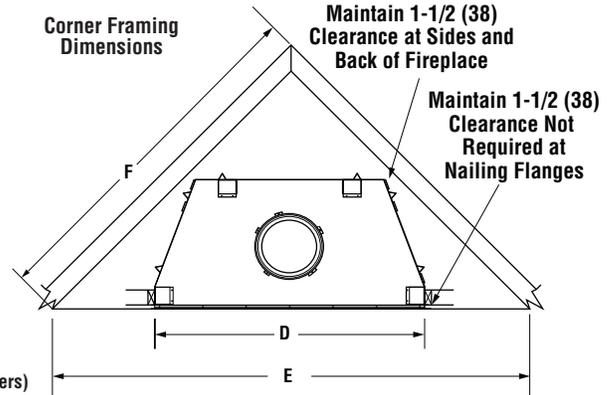


VRT6000 36/42/50 SERIES

VENT-FREE FIREPLACES (Box only, Mosaic Masonry Brick Liner Required)

Framing Dimensions

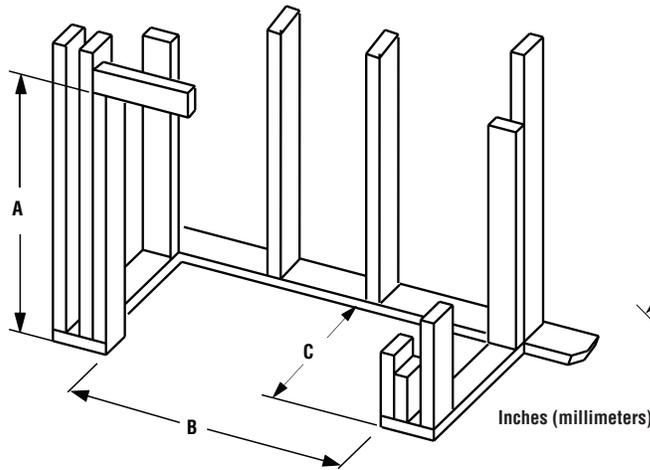


	36" Models	42" Models	50" Models
A	54-5/8 (1388)	54-5/8 (1388)	54-5/8 (1388)
B	45-3/8 (1153)	51-3/8 (1305)	59-3/8 (1509)
C	28-1/4 (718)	30-1/8 (766)	30-1/8 (766)

	36" Models	42" Models	50" Models
D	45-3/8 (1153)	51-3/8 (1305)	59-3/8 (1509)
E	86-1/2 (2198)	92 (2337)	100 (2540)
F	61 (1550)	65 (1651)	71 (1804)

Diagrams, illustrations and photographs are not to scale. Consult installation instructions. Product designs, materials, dimensions, specifications, colors, and prices are subject to change or discontinuance without notice.

Fireplace Dimensions

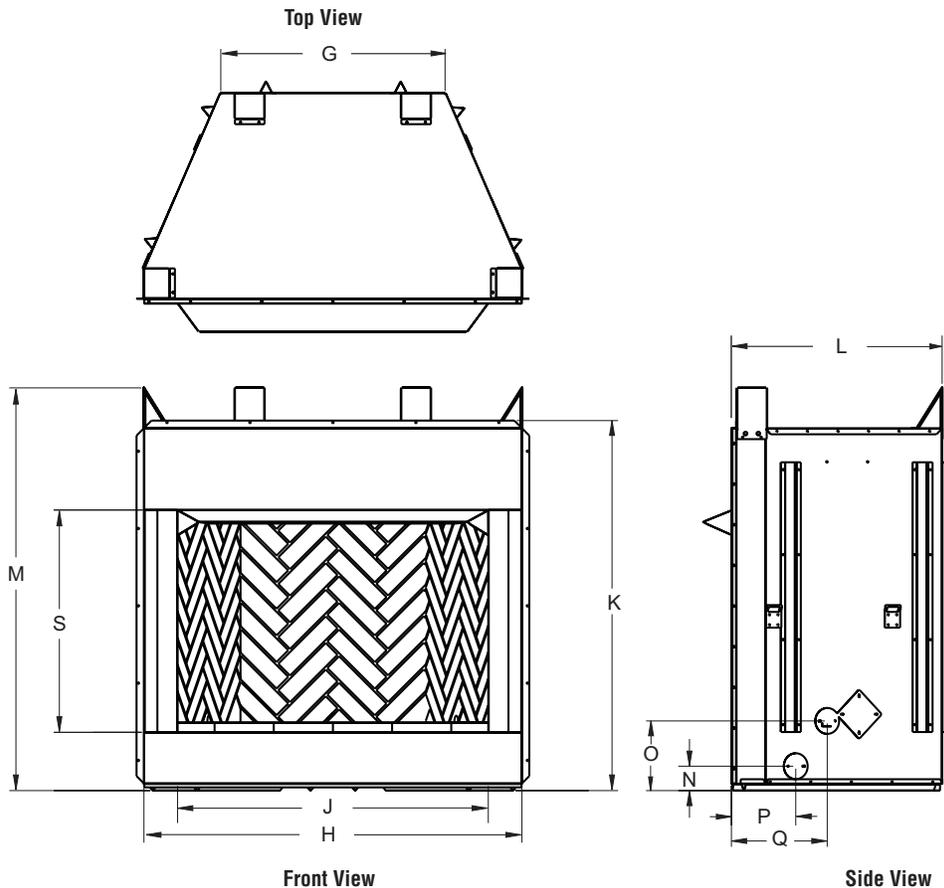

	36" Model	42" Model	50" Model
G	29 (737)	30-3/8 (772)	38-3/8 (975)
H	45-1/8 (1147)	51-1/8 (1299)	59-1/8 (1502)
J	36 (914)	42 (1067)	50 (1270)
K	50 (1270)	50 (1270)	50 (1270)
L	26-3/4 (680)	26-5/8 (677)	28-5/8 (727)
M	54-1/2 (1385)	54-1/2 (1385)	54-1/2 (1385)
N	3-3/8 (86)	3-3/8 (86)	3-3/8 (86)
O	9-1/2 (242)	9-1/2 (242)	9-1/2 (242)
P	7-3/8 (188)	8-3/4 (223)	8-3/4 (223)
Q	11-1/8 (283)	13 (330)	13 (330)
S	30 (762)	30 (762)	30 (762)

Inches (millimeters)

VRT6000 36/42/50 SERIES

Product Information

Fireplace Reference Information			
Cat. No.	Model	Shipping Wt.	Shipping Vol.
F4228	VRT6036	446 lb.	109.1 cu. ft.
F4229	VRT6042	520 lb.	109.1 cu. ft.
F4230	VRT6050	620 lb.	109.1 cu. ft.

Listing Information



Report No. F09-130


These appliances comply with National Safety Standards and are listed by PFS Corporation to ANSI Z21.11.2 as unvented Gas-fired room heaters.

Mosaic Masonry Brick Reference Information			
Cat. No.	Model	Shipping Wt.	Shipping Vol.
F0334	Mosaic36M2	421 lb.	24.5 cu. ft.
F0335	Mosaic36M4	421 lb.	24.5 cu. ft.
F0336	Mosaic36M2	421 lb.	24.5 cu. ft.
F0337	Mosaic36M4	421 lb.	24.5 cu. ft.
F0338	Mosaic36M5	421 lb.	24.5 cu. ft.
F0339	Mosaic36M3	421 lb.	24.5 cu. ft.
F0340	Mosaic36M5	421 lb.	24.5 cu. ft.
F0341	Mosaic36M3	421 lb.	24.5 cu. ft.

Mosaic Masonry Brick Reference Information			
Cat. No.	Model	Shipping Wt.	Shipping Vol.
F0342	Mosaic42M2	445 lb.	24.5 cu. ft.
F0343	Mosaic42M4	445 lb.	24.5 cu. ft.
F0344	Mosaic42M2	445 lb.	24.5 cu. ft.
F0345	Mosaic42M4	445 lb.	24.5 cu. ft.
F0346	Mosaic42M5	445 lb.	24.5 cu. ft.
F0347	Mosaic42M3	445 lb.	24.5 cu. ft.
F0348	Mosaic42M5	445 lb.	24.5 cu. ft.
F0349	Mosaic42M3	445 lb.	24.5 cu. ft.


Mosaic Masonry Brick Reference Information			
Cat. No.	Model	Shipping Wt.	Shipping Vol.
F0350	Mosaic50M2	498 lb.	24.5 cu. ft.
F0351	Mosaic50M4	498 lb.	24.5 cu. ft.
F0352	Mosaic50M2	498 lb.	24.5 cu. ft.
F0353	Mosaic50M4	498 lb.	24.5 cu. ft.
F0354	Mosaic50M5	498 lb.	24.5 cu. ft.
F0355	Mosaic50M3	498 lb.	24.5 cu. ft.
F0356	Mosaic50M5	498 lb.	24.5 cu. ft.
F0357	Mosaic50M3	498 lb.	24.5 cu. ft.

Clearances

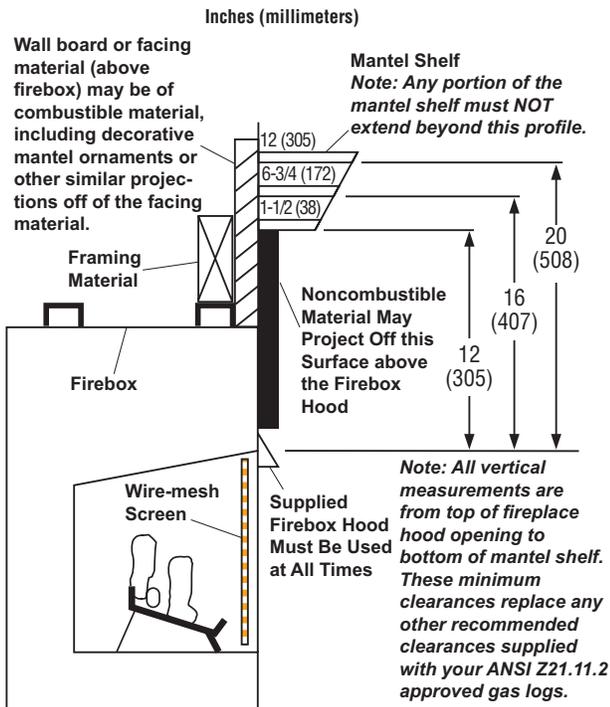



Minimum Wall and Ceiling Clearances (see figure below)

- A. Clearances from the side of the fireplace cabinet to any combustible material and wall should follow diagram shown here.
- Example:** The face of a mantel, bookshelf, etc. is made of combustible material and protrudes 3 1/2" from the wall. This combustible material must be 4" from the side of the fireplace cabinet.
- B. Clearances from the top of the firebox opening to the ceiling should not be less than 42".
- C. When the firebox is installed directly on carpeting, vinyl tile or other combustible material, other than wood flooring, the firebox should be installed on a metal or wood panel extending the full width and depth of the enclosure.
- D. Clearances from the bottom of firebox to the floor is 0".

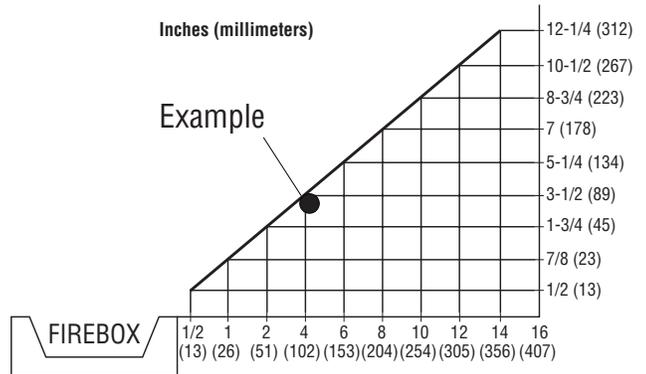

If the home meets certain criteria as defined in the Installation and operation manual, you must provide additional fresh air per the instructions in the manual.

Venting

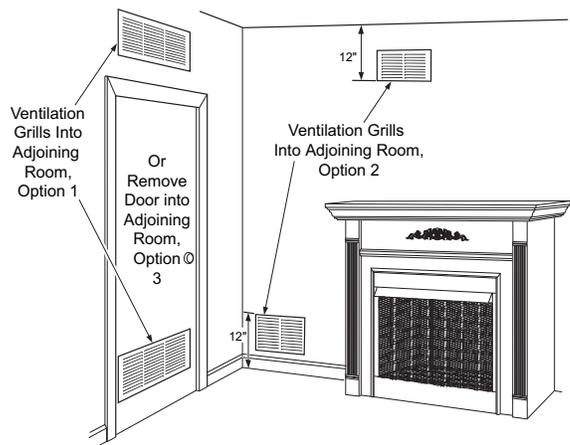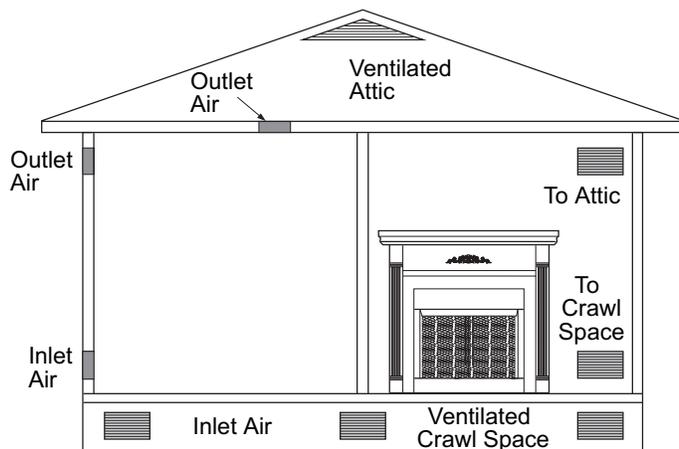

NOTE: DIAGRAMS & ILLUSTRATIONS ARE NOT TO SCALE.

Printed in U.S.A. © 2019 Innovative Hearth Products
P/N 901009-01 REV. NC 07/2019

