




DO NOT DISCARD. THIS MANUAL HAS IMPORTANT OPERATING AND MAINTENANCE INSTRUCTIONS. LEAVE WITH THE HOMEOWNER.

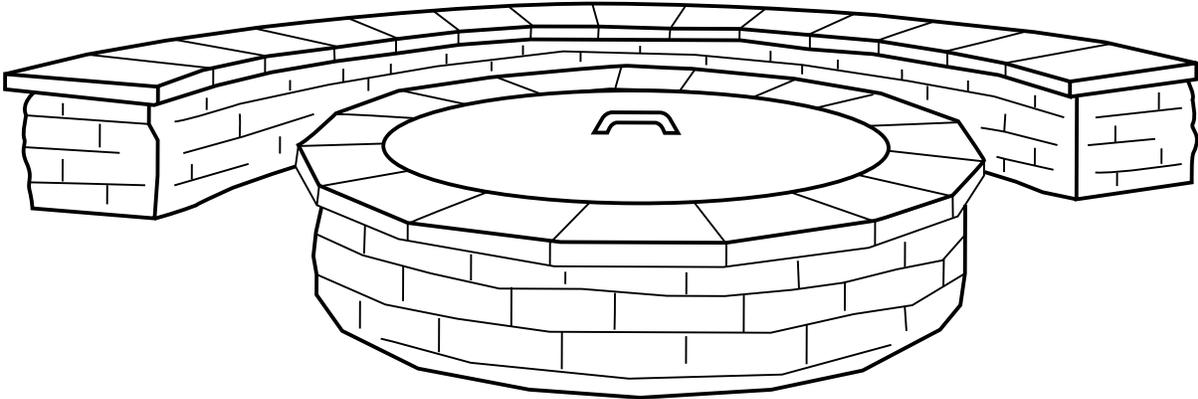

Fire Pit Lids

Installation and Operating Instructions


IF YOU CANNOT READ OR UNDERSTAND THESE INSTALLATION INSTRUCTIONS DO NOT ATTEMPT TO INSTALL OR OPERATE THIS APPLIANCE

Fire pit lids come in three common styles, round, square and linear (rectangular) shapes. Each lid will come with a handle, two washers and two screws.

CAUTION: Stainless steel covers can be hot to the touch when installed on your fire pit due to the sun and outdoor temperatures. Always use caution when handling.



CALIFORNIA PROPOSITION 65



WARNING

This product is designed to operate with one of the following fuel sources: Liquid Propane or Natural Gas. The fuel used to operate this product, and the products of combustion of such fuel, can expose you to chemicals including Benzene which is known to the State of California to cause cancer, birth defects and other reproductive harm and Carbon Monoxide which is known to the State of California to cause birth defects and other reproductive harm.

(For more information go to: www.p65Warnings.ca.gov)

ASSEMBLY

NOTE: Stainless steel lids will come with a protective plastic coating to prevent it from scratching during shipping on the top exposed side. Carefully remove the plastic coating then wipe off any residue that may remain from the coating itself. Remaining residue not cleaned off can be “baked” into the stainless steel finish and leave a permanent discoloring on the finish of the lid.

The handle installs on top of the lid (lip/edge/tabs facing downward). The idea is for the lid to be able to repel water and not accumulate it.

INSTALLATION

Using the handle, simply sit the lid over-top of the fire pit opening, centering it left to left and right to right resting on the top of the enclosure.

CAUTION: DO NOT OPERATE FIRE PIT WITH LID INSTALLED

NOTE: If a windshield is installed on the fire pit the lid should sit inside of the windshield centered side to side and end to end. Do not sit lid on top of the glass edge windshield.

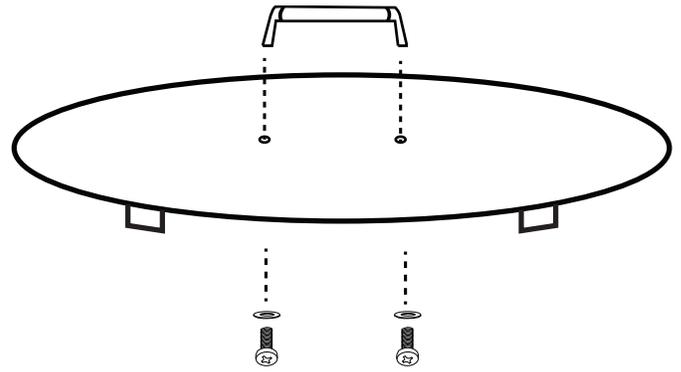


Fig. 1 Installing handle, screws, washers on lid.

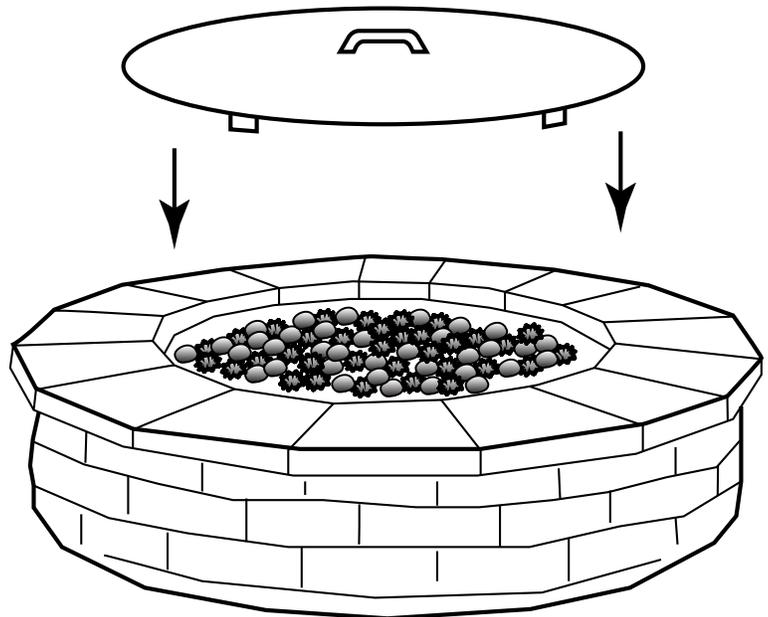


Fig. 2 Installing lid on fire pit closure.

CLEANING STAINLESS STEEL: Stainless steel tends to oxidize in the presence of chlorides and sulfides, particularly in coastal areas and other harsh environments, such as the warm, highly humid atmosphere around pools and hot tubs. To provide stain prevention and removal, wash all stainless steel surfaces every 3-4 weeks or as often as required with fresh water and/or a stainless steel cleaner.

NOTES ON CLEANING: Do not use abrasive cleaners or steel wool on any stainless steel parts. Doing so will scratch the finish. Exterior surfaces should be cleaned with warm soapy water. Use a stainless steel or non-abrasive cleaner. Always wipe in the direction of the grain.

FOR TECHNICAL SERVICE, CALL: (800) 966-8126

Firegear Outdoors
17322 Gotchard St
Huntington Beach, CA 92647

WEB SITE: www.firegearoutdoors.com