
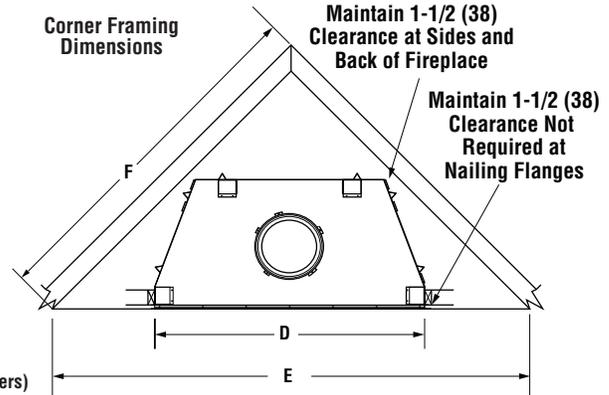


VRE6000 36/42/50 SERIES

OUTDOOR VENT-FREE FIREPLACES (Box only, Mosaic Masonry Brick Liner Required)

Framing Dimensions

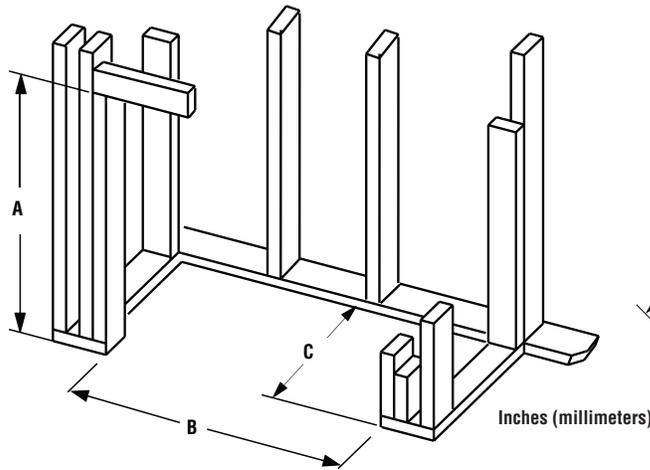


	36" Models	42" Models	50" Models
A	54-5/8 (1388)	54-5/8 (1388)	54-5/8 (1388)
B	45-3/8 (1153)	51-3/8 (1305)	59-3/8 (1509)
C	28-1/4 (718)	30-1/8 (766)	30-1/8 (766)

	36" Models	42" Models	50" Models
D	45-3/8 (1153)	51-3/8 (1305)	59-3/8 (1509)
E	86-1/2 (2198)	92 (2337)	100 (2540)
F	61 (1550)	65 (1651)	71 (1804)

Diagrams, illustrations and photographs are not to scale. Consult installation instructions. Product designs, materials, dimensions, specifications, colors, and prices are subject to change or discontinuance without notice.

Fireplace Dimensions

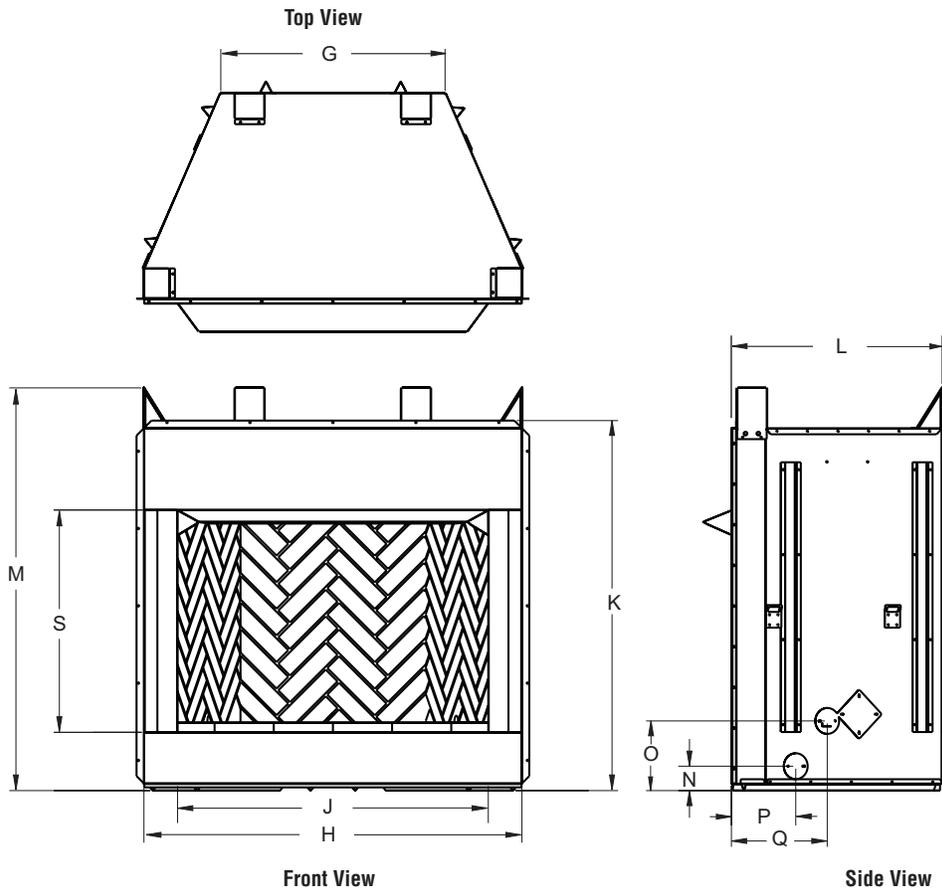

	36" Model	42" Model	50" Model
G	29 (737)	30-3/8 (772)	38-3/8 (975)
H	45-1/8 (1147)	51-1/8 (1299)	59-1/8 (1502)
J	36 (914)	42 (1067)	50 (1270)
K	50 (1270)	50 (1270)	50 (1270)
L	26-3/4 (680)	26-5/8 (677)	28-5/8 (727)
M	54-1/2 (1385)	54-1/2 (1385)	54-1/2 (1385)
N	3-3/8 (86)	3-3/8 (86)	3-3/8 (86)
O	9-1/2 (242)	9-1/2 (242)	9-1/2 (242)
P	7-3/8 (188)	8-3/4 (223)	8-3/4 (223)
Q	11-1/8 (283)	13 (330)	13 (330)
S	30 (762)	30 (762)	30 (762)

Inches (millimeters)

VRE6000 36/42/50 SERIES

Product Information

Fireplace Reference Information			
Cat. No.	Model	Shipping Wt.	Shipping Vol.
F4225	VRE6036	446 lb.	109.1 cu. ft.
F4226	VRE6042	529 lb.	109.1 cu. ft.
F4227	VRE6050	620 lb.	109.1 cu. ft.

Mosaic Masonry Brick Reference Information			
Cat. No.	Model	Shipping Wt.	Shipping Vol.
F0334	Mosaic36M2	421 lb.	24.5 cu. ft.
F0335	Mosaic36M4	421 lb.	24.5 cu. ft.
F0336	Mosaic36M2	421 lb.	24.5 cu. ft.
F0337	Mosaic36M4	421 lb.	24.5 cu. ft.
F0338	Mosaic36M5	421 lb.	24.5 cu. ft.
F0339	Mosaic36M3	421 lb.	24.5 cu. ft.
F0340	Mosaic36M5	421 lb.	24.5 cu. ft.
F0341	Mosaic36M3	421 lb.	24.5 cu. ft.

Mosaic Masonry Brick Reference Information			
Cat. No.	Model	Shipping Wt.	Shipping Vol.
F0342	Mosaic42M2	445 lb.	24.5 cu. ft.
F0343	Mosaic42M4	445 lb.	24.5 cu. ft.
F0344	Mosaic42M2	445 lb.	24.5 cu. ft.
F0345	Mosaic42M4	445 lb.	24.5 cu. ft.
F0346	Mosaic42M5	445 lb.	24.5 cu. ft.
F0347	Mosaic42M3	445 lb.	24.5 cu. ft.
F0348	Mosaic42M5	445 lb.	24.5 cu. ft.
F0349	Mosaic42M3	445 lb.	24.5 cu. ft.

Mosaic Masonry Brick Reference Information			
Cat. No.	Model	Shipping Wt.	Shipping Vol.
F0350	Mosaic50M2	498 lb.	24.5 cu. ft.
F0351	Mosaic50M4	498 lb.	24.5 cu. ft.
F0352	Mosaic50M2	498 lb.	24.5 cu. ft.
F0353	Mosaic50M4	498 lb.	24.5 cu. ft.
F0354	Mosaic50M5	498 lb.	24.5 cu. ft.
F0355	Mosaic50M3	498 lb.	24.5 cu. ft.
F0356	Mosaic50M5	498 lb.	24.5 cu. ft.
F0357	Mosaic50M3	498 lb.	24.5 cu. ft.


Listing Information



Report No. F09-130


These appliances comply with National Safety Standards and are listed by PFS Corporation to ANSI Z21.91 Ventless Firebox Enclosures for Gas-Fired Unvented Decorative Room Heaters.

Clearances

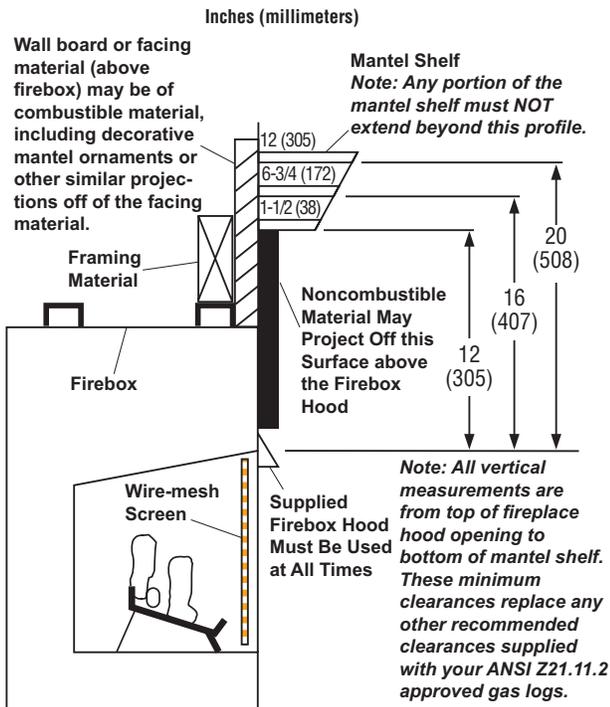


Minimum Wall and Ceiling Clearances (see figure below)

- A. Clearances from the side of the fireplace cabinet to any combustible material and wall should follow diagram shown here.
Example: The face of a mantel, bookshelf, etc. is made of combustible material and protrudes 3 1/2" from the wall. This combustible material must be 4" from the side of the fireplace cabinet.
- B. Clearances from the top of the firebox opening to the ceiling should not be less than 42".
- C. When the firebox is installed directly on carpeting, vinyl tile or other combustible material, other than wood flooring, the firebox should be installed on a metal or wood panel extending the full width and depth of the enclosure.
- D. Clearances from the bottom of firebox to the floor is 0".

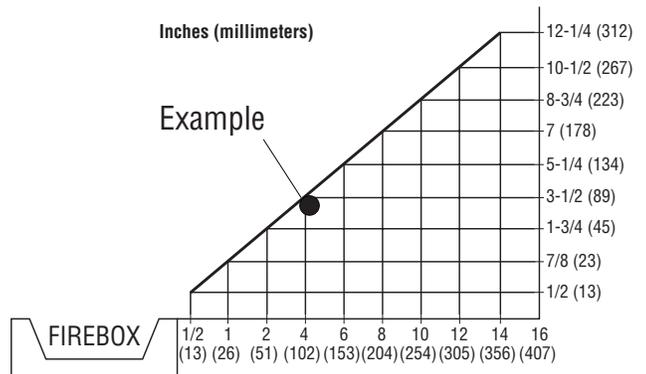

Nailing Flanges

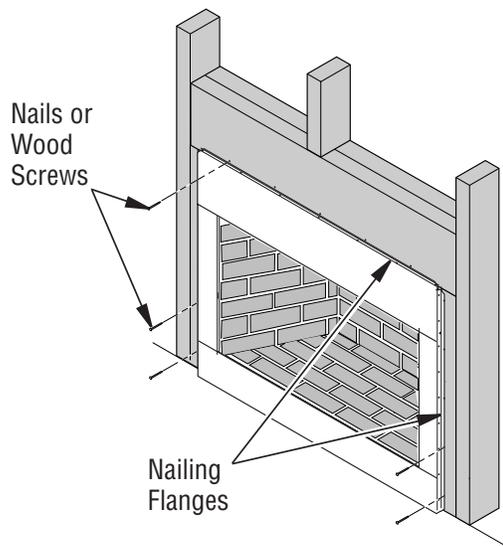

Specifications and clearances are subject to change without notice. Refer to Installation Manual before installation of these appliances for updated dimensions and instructions.

NOTE: DIAGRAMS & ILLUSTRATIONS ARE NOT TO SCALE.

Printed in U.S.A. © 2019 Innovative Hearth Products
P/N 901010-01 REV. NC 07/2019

